

Construction



RocBloc™

Renovation Debris Containment



RocBloc™ Complete Debris Containment

- The control and containment of spauling and falling construction debris near an adjacent work area or public way during renovation is as important as the construction plan itself.
- As part of an overall containment program, the use of multi-layered RocBloc barrier netting helps prevent the spread of dust and debris to protected parts of a facility – allowing public activities to continue uninterrupted.
- Durable and reusable RocBloc nets are available in single panel or stacked configurations with a selection of debris liners to meet your exact job requirements.
- InCord debris liner options include fine mesh small particle containment and nonporous complete block protection.
- RocBloc 2-1/2 inch structural netting combined with a single liner or combination of liners, provides a versatile containment system of superior strength for applications requiring wet or dry debris containment.
- Our netting ensures unrestricted work site access and work flow. For construction debris containment, safety engineering and construction managers look to InCord for custom solutions.
- RocBloc debris net systems are custom sized and fabricated to meet your project requirements.
- RocBloc safety netting complies with OSHA regulations for debris net installations and meets CPAI-84, Section 6, Tent Walls and Tops.
- RocBloc meets conformity standard ANSI A10.37 for Debris Net Systems for Construction and Demolition.

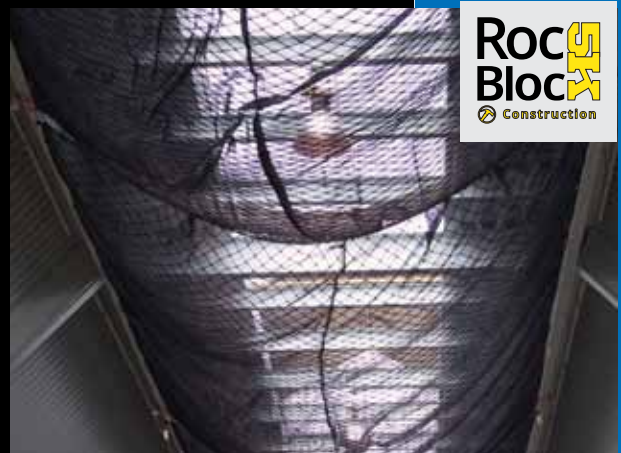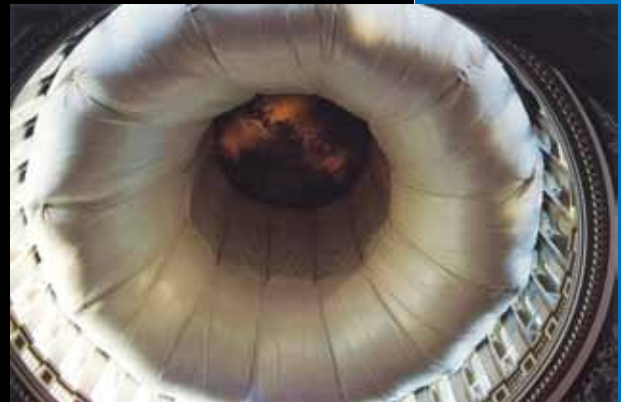

RocBloc™ debris, dust and containment netting protects what is valuable from that which is being restored.

Roc-Bloc panels may be suspended, wrapped or linked together in configurations designed for your application and ease of debris clearance.



N-820H black structural netting with WS70 black liner.



12 cubic feet of concrete caught by safety netting with debris liner.



Aetna Atrium Renovation, Hartford, CT

Debris Net Specifications for N-820H

- Style: Raschel Knotless Netting
- Fiber High Tenacity, Polypropylene (HTPP)
- Cord Diameter 3/16 inch (5 mm)
- Mesh Size..... 2-1/2 inch (60 mm) square opening
- Load Test, Max ... 6000 lb (2700 kg)
- Weight 0.0528 lb/ft² (258 g/m²)
- Melting Point..... 320°F (160°C)
- UV..... Extra UV Stabilizers added
- Colors Black, Gray, Sand



Comstock Covered Bridge Restoration Project

Debris Liners



WS70BK
1/8" Knitted Polyethylene
Opacity 70 %



WS85SD
1/16" Knitted Polyethylene
Opacity 85 %



3/8" Knitted Polyester
DNR900 FR Black • DNR850 FR Gray • DNR500 FR Sand



Spillex™
10 mil extruded poly with
scrim reinforcement



Call InCord for all your netting needs at 1-800-596-1066



InCord

226 Upton Road
Colchester, CT 06415

Phone: 860-537-1414 • Fax: 860-537-7393
incord.com • netting@incord.com



InCord is an ISO 9001
registered company
CAGE Code No. 1NPR7

INCORDB